


NSN69 LED Display

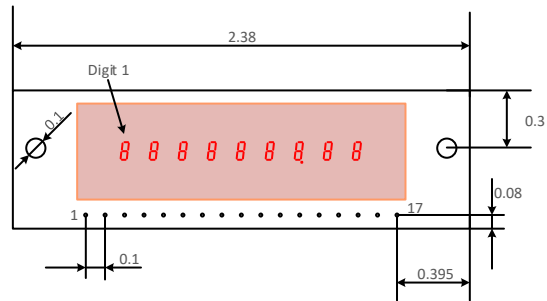

This is a 9 digit 7 segment display, with decimal pointer on digit number 7 only. Common cathode.

Pinout:

1. Digit - 1
2. Segment - c
3. Digit - 2
4. Segment - dp
5. Digit - 3
6. Segment - a
7. Digit - 4
8. Segment - e
9. Digit - 5
10. Segment - d
11. Digit - 6
12. Segment - g
13. Digit - 7 (with decimal pointer)
14. Segment - b
15. Digit - 8
16. Segment - f
17. Digit - 9

