


Brief overview

- Q1002, R1003, D1002 preform an active transient protection. It will suppress voltages up to 200V.
- Q1001, R1001, D1001 preform a reverse polarity protection. If the input signal is the wrong polarity, the gate will not conduct which will prevent current from flowing.
- D1003 is a second transient suppressor, it would catch faster transients allowing a brief amount of time for Q1002 to preform it's duty.
- C1001 is a bulk cap, it simply stores energy locally such that the regulator can draw large currents in short periods of time.
- U1001 and the components to the right, are a buck style switching regulator, that will pull the 5V line up to 5V. It will now pull it down from 5V if there is an external voltage.

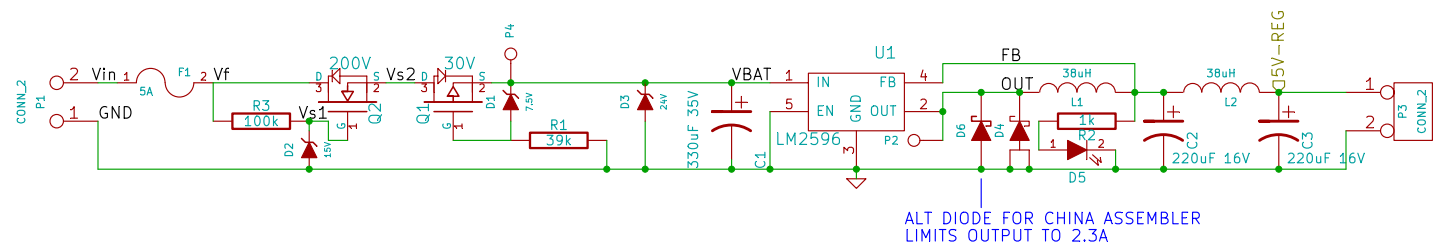

<https://sourceforge.net/p/rusefi/>

File: PWR\_buck\_12V\_switcher.sch

Sheet: /

**Title: PWR buck 12V switcher regulator**

Size: A Date: 4 oct 2015

Rev: .04

KiCad E.D.A. eeschema (2013-07-07 BZR 4022)-stable

Id: 1/1