


ENGINE CONTROL MODULE (ECM) I/O SIGNALS

ENGINE (DIAGNOSTICS)

5. Engine Control Module (ECM) I/O Signals

A: ELECTRICAL SPECIFICATIONS

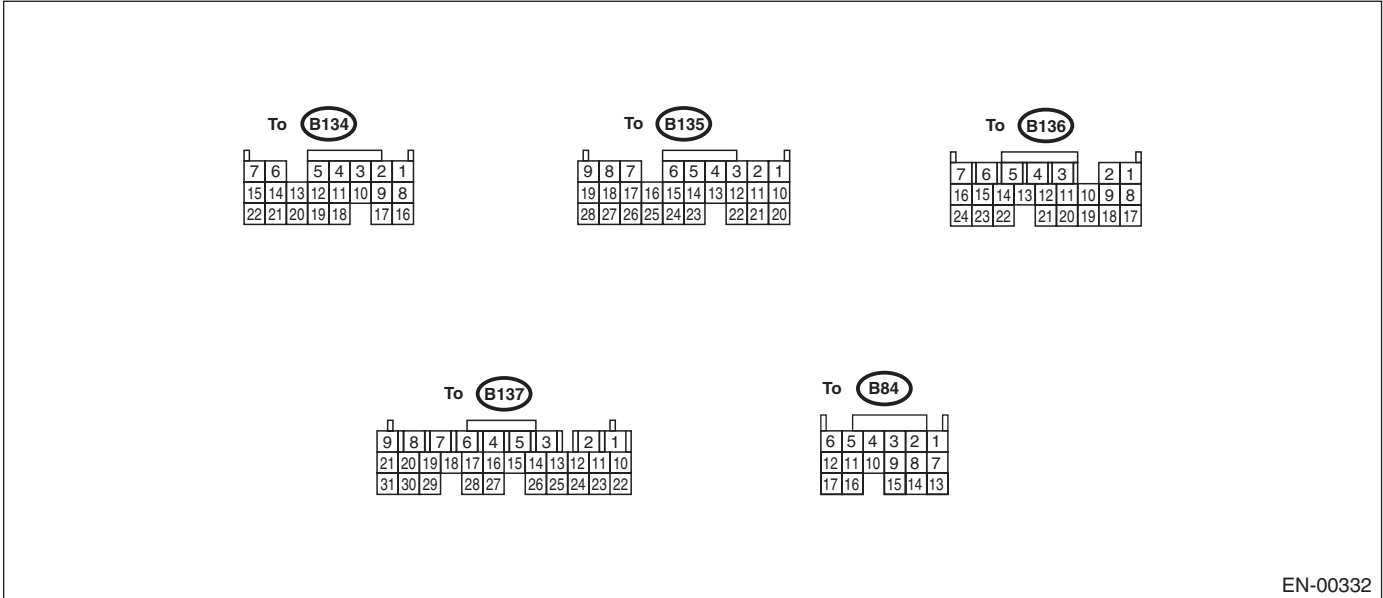

EN-00332

Content		Con- nector No.	Termi- nal No.	Signal (V)		Note
				Ignition SW ON (Engine OFF)	Engine ON (Idling)	
Crank- shaft position sensor	Signal (+)	B135	2	0	-7 — +7	Sensor output waveform
	Signal (-)	B135	11	0	0	—
	Shield	B135	21	0	0	—
Camshaft position sensor	Signal (+)	B135	1	0	-7 — +7	Sensor output waveform
	Signal (-)	B135	10	0	0	—
	Shield	B135	21	0	0	—
Throttle position sensor	Signal	B135	7	Fully closed: 0.2 — 1.0 Wide open: 4.2 — 4.7		—
	Power supply	B135	9	5	5	—
	GND (sensor)	B135	19	0	0	—
Rear oxygen sensor	Signal	B135	17	0	0 — 0.9	—
	Shield	B135	26	0	0	—
	GND (sensor)	B135	19	0	0	—
Front oxygen (A/F) sensor heater	Signal 1	B137	5	0 — 1.0	0 — 1.0	—
	Signal 2	B137	4	0 — 1.0	0 — 1.0	—
Rear oxygen sensor heater signal		B136	13	0 — 1.0	0 — 1.0	—
Engine coolant temperature sensor	Signal	B135	18	1.0 — 1.4	1.0 — 1.4	After engine warmed up.
	GND (sensor)	B135	19	0	0	After engine warmed up.
Vehicle speed signal		B134	1	0 or 5	0 or 5	"5" and "0" are repeatedly displayed when vehicle is driven.

ENGINE CONTROL MODULE (ECM) I/O SIGNALS

ENGINE (DIAGNOSTICS)

Content		Con- nector No.	Termi- nal No.	Signal (V)		Note
				Ignition SW ON (Engine OFF)	Engine ON (Idling)	
Mass air flow sen- sor	Signal	B84	13	—	0.3 — 4.5	—
	Shield	B84	8	0	0	—
	GND	B84	7	0	0	—
Intake air temperature sensor signal		B135	27	—	—	—
Exhaust gas tem- perature sensor	Signal	B135	16	—	—	—
	GND (sensor)	B135	19	0	0	—
Tumble generator valve posi- tion sensor RH	Signal	B135	23	Fully closed: 0.2 — 1.0 Wide open: 4.2 — 4.7		—
	Power supply	B135	9	5	5	—
	GND (sensor)	B135	19	0	0	—
Tumble generator valve posi- tion sensor LH	Signal	B135	13	Fully closed: 0.2 — 1.0 Wide open: 4.2 — 4.7		—
	Power supply	B135	9	5	5	—
	GND (sensor)	B135	19	0	0	—
Tumble generator valve RH (open)		B84	4	0 or 5	0 or 5	—
Tumble generator valve RH (closed)		B84	5	0 or 5	0 or 5	—
Tumble generator valve LH (open)		B84	10	0 or 5	0 or 5	—
Tumble generator valve LH (closed)		B84	11	0 or 5	0 or 5	—
Waste gate control solenoid valve		B137	24	10 — 13	13 — 14	—
Starter switch		B134	16	0	0	Cranking: 8 — 14
A/C switch		B134	2	ON: 10 — 13 OFF: 0	ON: 13 — 14 OFF: 0	—
Ignition switch		B134	5	10 — 13	13 — 14	—
Neutral position switch		B134	8	ON: 12±0.5 OFF: 0		Switch is ON when gear is in neutral position.
Test mode connector		B134	14	5	5	When connected: 0
Knock sensor	Signal	B135	4	2.8	2.8	—
	Shield	B135	22	0	0	—
Backup power supply		B137	10	10 — 13	13 — 14	Ignition switch OFF: 10 — 13
Control unit power sup- ply		B137	2	10 — 13	13 — 14	—
		B137	3	10 — 13	13 — 14	—
Sensor power supply		B135	9	5	5	—
Line end check 1		B134	10	0	0	—
Ignition control	#1	B136	24	0	13 — 14	Waveform
	#2	B136	23	0	13 — 14	Waveform
	#3	B136	22	0	13 — 14	Waveform
	#4	B136	21	0	13 — 14	Waveform

ENGINE CONTROL MODULE (ECM) I/O SIGNALS

ENGINE (DIAGNOSTICS)

Content		Con- nector No.	Termi- nal No.	Signal (V)		Note
				Ignition SW ON (Engine OFF)	Engine ON (Idling)	
Fuel injec- tor	#1	B137	1	10 — 13	1 — 14	Waveform
	#2	B136	6	10 — 13	1 — 14	Waveform
	#3	B136	5	10 — 13	1 — 14	Waveform
	#4	B136	4	10 — 13	1 — 14	Waveform
Idle air control solenoid valve	Signal	B136	10	0 or 13 — 14	0 or 13 — 14	Waveform
Fuel pump controller	Signal 1	B134	13	—	—	—
	Signal 2	B136	15	—	—	—
A/C relay control		B137	27	ON: 0.5 or less OFF: 10 — 13	ON: 0.5 or less OFF: 13 — 14	—
Radiator fan relay 1 control		B137	17	ON: 0.5 or less OFF: 10 — 13	ON: 0.5 or less OFF: 13 — 14	—
Radiator fan relay 2 control		B137	28	ON: 0.5 or less OFF: 10 — 13	ON: 0.5 or less OFF: 13 — 14	Only vehicles with A/C
Malfunction indicator lamp		B137	15	—	—	ON: 1 or less OFF: 10 — 14
Engine speed output		B136	9	—	0 — 13 or more	Waveform
Purge control solenoid valve		B137	16	ON: 1 or less OFF: 10 — 13	ON: 1 or less OFF: 13 — 14	—
Pressure sensor	Signal	B135	8	1.7 — 2.4	1.1 — 1.6	—
	Power supply	B135	9	5	5	
	GND (sen- sor)	B135	19	0	0	
Exhaust temperature sensor		B135	16	2.5 — 3.8	2.5 — 3.8	Ambient temperature: 25°C (75°F)
Fuel tank pressure sensor	Signal	B135	15	2.3 — 2.7	2.3 — 2.7	The valve operates when fuel filler cap is removed and rein- stalled.
	GND (sen- sor)	B135	19	0	0	—
Pressure control sole- noid valve		B137	22	ON: 1 or less OFF: 10 — 13	ON: 1 or less OFF: 13 — 14	—
Drain valve		B137	11	ON: 1 or less OFF: 10 — 13	ON: 1 or less OFF: 13 — 14	—
Fuel tank sensor control valve		B137	23	ON: 1 or less OFF: 10 — 13	ON: 1 or less OFF: 13 — 14	—
Fuel level sensor		B135	25	0.12 — 4.75	0.12 — 4.75	—
Small light switch		B134	17	ON: 0 OFF: 10 — 13	ON: 0 OFF: 13 — 14	—
Blower fan switch		B134	9	ON: 0 OFF: 10 — 13	ON: 0 OFF: 13 — 14	—
Rear defogger switch		B134	3	ON: 0 OFF: 10 — 13	ON: 0 OFF: 13 — 14	—
Power steering oil pres- sure switch		B135	24	10 — 13	ON: 0 OFF: 13 — 14	—
Front oxygen (A/F) sen- sor signal (+)		B137	29	2.8 — 3.2	2.8 — 3.2	—
Front oxygen (A/F) sen- sor signal (-)		B137	19	2.4 — 2.7	2.4 — 2.7	—

ENGINE CONTROL MODULE (ECM) I/O SIGNALS

ENGINE (DIAGNOSTICS)

Content	Con- nector No.	Termi- nal No.	Signal (V)		Note
			Ignition SW ON (Engine OFF)	Engine ON (Idling)	
Front oxygen (A/F) sensor shield	B137	18	0	0	—
SSM/GST communication line	B134	21	Less than 1 ←→ More than 4	Less than 1 ←→ More than 4	—
Torque control 1 signal	B134	19	4 or more	4 or more	—
Torque control 2 signal	B134	18	4 or more	4 or more	—
Torque control cut signal	B136	14	8	8	—
AT diagnosis input signal	B135	20	Less than 1 ←→ More than 4	Less than 1 ←→ More than 4	Waveform
AT load signal	B135	28	4.3 — 4.4	0.9 — 1.4	—
GND (sensor)	B135	19	0	0	—
GND (injectors)	B136	8	0	0	—
GND (ignition system)	B136	18	0	0	—
GND (power supply)	B136	17	0	0	—
	B134	22	0	0	—
GND (control systems)	B134	7	0	0	—
	B134	15	0	0	—
GND (oxygen sensor heater 1)	B137	9	0	0	—
GND (oxygen sensor heater 2)	B137	8	0	0	—